


# Pyro-Clean®

Applied Test Systems (ATS) is excited to announce that the Pyro-Clean® is now CE certified. Designed to burn off test residue from lab equipment, the ATS Pyro-Clean® improves on previous versions and incorporates state of the art touchscreen technology, automatic operation, and a clean, matte-black design. Lab technicians no longer need to rely on scraping, wire brushing, or hand heating to clean equipment. Operators can simply place everything in their Pyro-Clean®, press start, and allow the machine to do the work. This not only reduces mess, but saves time and creates a safer, more efficient lab environment. With the new CE certification, our European customers can now experience all that the Pyro-Clean® has to offer.

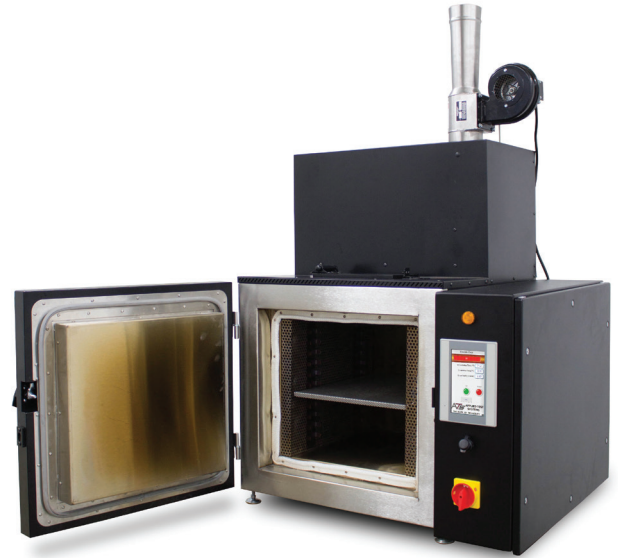

## Features

- CE Certified
- Low operating costs allow users to save both time and money.
- Industrial strength touchscreen display and enhanced ATS software.
- Adjustable shelves to accommodate a variety of equipment and sample holder sizes.
- Suitable for use in Asphalt, Injection Molding, and Organic Chemistry applications.
- Fully automatic: saves valuable lab time by removing the need to hand clean equipment or monitor cleaning.
- Destroys even trace residues of organic contaminants, leaving lab equipment ultra clean for critical testing.
- Reduces or eliminates the costs of hazardous waste material disposal, the dangers of glass breakage, and the overall mess associated with manual equipment cleaning.
- Language options include English, German, French, Italian, Chinese, Spanish, and Arabic.
- Developed utilizing more than 50 years of process heating and materials testing industry experience.

## Product Specifications

Interior Dimensions	
Cleaning Temperature	User adjustable, factory setting 900°F
Electrical Power	240 V, 60Hz., Single Phase
Safety Controls	High temp switch
Weight	380 lbs.
Exterior Dimensions	37.85" wide x 59.3" high x 32.8" deep
Oven Capacity	14.88" wide x 16" high x 18.5" deep (2.5 cubic foot)