


# Rolling Thin Film Oven (RTFO Touch)

Applied Test Systems (ATS) has been manufacturing custom furnaces and ovens since 1965, and entered into the asphalt binder testing market in the early 1990's with the introduction of Superpave. The ATS RTFO Touch combines years of experience in both process heating and asphalt binder testing, creating a highly user friendly and efficient piece of testing equipment. Designed to simulate short-term aging of asphalt binder according to ASTM D2872, AASHTO T240, EN 12607, Superpave, and California Test Method 346 test standards, the RTFO Touch offers customizable options and intuitive software to accommodate a broad spectrum of users.

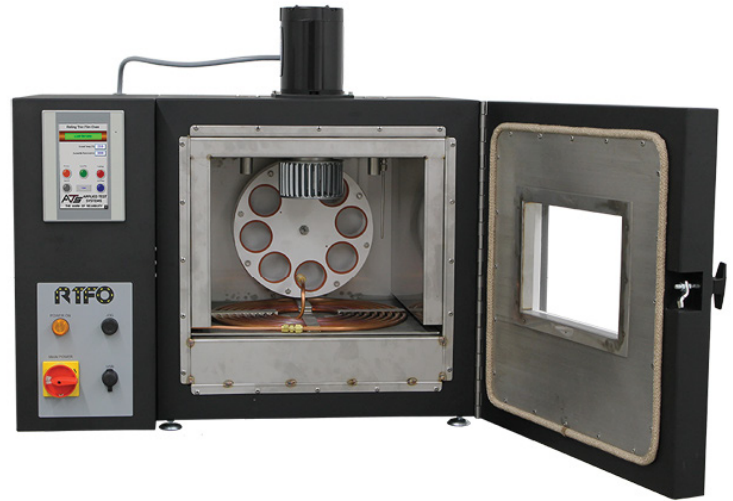


## Features

- CE certified
- Double walled stainless steel interior capable of maintaining temperature of up to 205°C (401°F)
- Durable black powder-coated exterior
- User friendly touchscreen display
- NIST traceable platinum RTD
- NIST traceable digital flow meter
- Heat-recovery time around 5 minutes after specimens are loaded
- Remote monitoring communication
- Programmable airflow, temperature, and duration of the aging process
- Data acquisition
- End-of-process alarm (both visual and audible)
- USB Port on the front for data downloads and software updates
- Pre-programmed with English, German, Spanish, French, Italian, Chinese, and Arabic language options

## Product Specifications

Specimen Capacity	8 high temperature glass bottles
Temperature Range	0°C to 205°C ± 0.5°C
Air Requirements	A source of clean, dry air with 60-150 psi
Speed Control	Within 15 ± 0.05 RPM
Power Requirements	208 VAC, 1 ph, 50/60 Hz, 20 A
Dimensions	34 in W x 28.25 in D x 32 in H
Weight	270 lb

## Exclusive Features

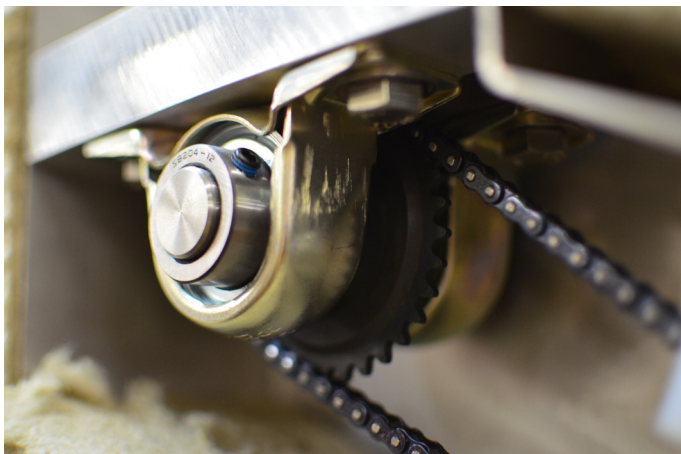

Sealed high temp bearings located outside of heat zone for zero maintenance & durability.



Silicone rings allow for easy install and prevent damage to bottles.



Bottom tray & elements easily accessible for cleaning and upkeep.